


# MICHELIN® Premier® A/S

Safe When New. Safe When Worn<sup>1</sup>.

Even when worn, the MICHELIN® Premier® A/S tire still stops shorter on wet roads than leading competitors' brand-new tires<sup>2</sup>.



## ALL-SEASON TIRE

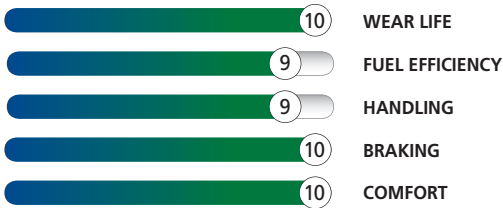

## BENEFITS OF MICHELIN® PREMIER® A/S TIRES:

- **Shorter Stopping.** Even when worn, the MICHELIN® Premier® A/S tire still stops shorter on wet roads than leading competitors' brand-new tires<sup>2</sup>.
- **Hydroplaning Resistance.** With EverGrip™ Technology, expanding rain grooves widen and emerging grooves open to maintain traction as the tire wears.
- **Excellent Wet Grip.** Extreme amounts of silica in the high-traction tread compound provide exceptional wet grip for everyday handling.
- **Lasting Winter Performance.** Sunflower oil keeps the high-traction tread compound flexible in lower temperatures, while multiple tread blocks and sipes act as biting edges to cut through the snow.

## Popular Replacement Market Fitments:

BMW 328i • Toyota Corolla • Ford Fusion • Honda Accord • Toyota Camry  
Nissan Altima • Mazda 6 • Cadillac CTS • Hyundai Genesis • MINI Cooper  
Nissan Maxima • Hyundai Elantra



<sup>1</sup> Safe refers to wet braking, wet handling and hydroplaning resistance when tires are new and worn to 5/32".  
<sup>2</sup> Based on internal wet braking tests from 40 and 50 mph vs. Goodyear® Assurance® TripleTred™ A/S tires in sizes 235/55R17 99H and P215/60R1694V, Bridgestone® Turanza™ Serenity Plus tire in size P215/60R1695V, using the MICHELIN® Premier® A/S tires in sizes 235/55R1799H and 215/60R1695V buffed to 5/32" of tread. Actual on-road results may vary.



MICHELIN® Premier® A/S

Tire Size	Service Description	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @ 45 mph	Max Load Single (lbs@psi)
185/55R16	83H	65661	5.0 – 6.5	7.6 on 6.0	24.0	8.5	866	1074@44
185/65R15	88H	99018	5.0 – 6.5	7.4 on 5.5	24.5	8.5	851	1235@44
195/55R15	85V	16874	5.5 – 7.0	7.9 on 6.0	23.4	8.5	888	1135@44
195/55R16	87V	14687	5.5 – 7.0	7.9 on 6.0	24.4	8.5	852	1201@44
195/60R15	88H	47950	5.5 – 7.0	7.9 on 6.0	24.2	8.5	859	1235@44
195/65R15	91H	55457	5.5 – 7.0	7.9 on 6.0	25.0	8.5	832	1356@44
205/45R17	84V	18320	6.5 – 7.5	8.1 on 7.0	24.3	8.5	858	1102@44
205/50R16	87V	83271	5.5 – 7.5	8.4 on 6.5	24.1	8.5	863	1201@44
205/50R17/XL	93H	28207	5.5 – 7.5	8.4 on 6.5	25.1	8.5	828	1433@50
205/50R17/XL	93V	93054	5.5 – 7.5	8.4 on 6.5	25.1	8.5	828	1433@50
205/55R16	91H	03364	5.5 – 7.5	8.4 on 6.5	24.9	8.5	836	1356@44
205/55R16	91V	28886	5.5 – 7.5	8.4 on 6.5	24.9	8.5	836	1356@44
205/60R15	91H	29199	5.5 – 7.5	8.4 on 6.5	24.7	8.5	842	1356@44
205/60R16	92H	43030	5.5 – 7.5	8.2 on 6.0	25.7	8.5	810	1389@44
205/60R16	92V	05577	5.5 – 7.5	8.2 on 6.0	25.7	8.5	810	1389@44
205/65R15	94H	06189	5.5 – 7.5	8.2 on 6.0	25.5	8.5	817	1477@44
205/65R16	95H	13768	5.5 – 7.5	8.2 on 6.0	26.5	8.5	786	1521@51
215/45R17	87H	30054	7.0 – 8.0	8.4 on 7.0	24.7	8.5	844	1201@44
215/45R17	87V	28504	7.0 – 8.0	8.4 on 7.0	24.7	8.5	844	1201@44
215/50R17/XL	95V	90458	6.0 – 7.5	8.9 on 7.0	25.5	8.5	815	1521@50
215/55R16	93H	09762	6.0 – 7.5	8.9 on 7.0	25.3	8.5	823	1433@44
215/55R17	94H	33915	6.0 – 7.5	8.9 on 7.0	26.3	8.5	791	1477@44
215/55R17	94V	73446	6.0 – 7.5	8.9 on 7.0	26.3	8.5	791	1477@44
215/60R16	95H	11712	6.0 – 7.5	8.7 on 6.5	26.1	8.5	796	1521@44
215/60R16	95V	22475	6.0 – 7.5	8.7 on 6.5	26.1	8.5	796	1521@44
225/45R17	91H	37417	7.0 – 8.5	8.9 on 7.5	25.0	8.5	833	1356@44
225/45R17	91V	88269	7.0 – 8.5	8.9 on 7.5	25.0	8.5	833	1356@44
225/50R17	94V	79471	6.0 – 8.0	9.2 on 7.0	25.9	8.5	803	1477@44
225/55R16	95H	87266	6.0 – 8.0	9.2 on 7.0	25.8	8.5	808	1521@44
225/55R17	97H	48163	6.0 – 8.0	9.2 on 7.0	26.8	8.5	777	1609@44
225/55R17	97V	28800	6.0 – 8.0	9.2 on 7.0	26.8	8.5	777	1609@44
225/55R18	98H	97967	6.0 – 8.0	9.2 on 7.0	27.8	8.5	749	1653@44
225/60R16	98H	67121	6.0 – 8.0	9.0 on 6.5	26.6	8.5	782	1653@44
225/60R17	99H	67961	6.0 – 8.0	9.0 on 6.5	27.6	8.5	753	1709@44
225/60R18	100H	08300	6.0 – 8.0	9.0 on 6.5	28.6	8.5	727	1764@44
225/65R16	100H	47563	6.0 – 8.0	9.0 on 6.5	27.5	8.5	757	1764@44
235/45R17	94H	92084	7.5 – 9.0	9.3 on 8.0	25.4	8.5	821	1477@44
235/45R17	94V	95470	7.5 – 9.0	9.3 on 8.0	25.4	8.5	821	1477@44
235/50R17	96H	20973	6.5 – 8.5	9.7 on 7.5	26.3	8.5	791	1565@44
235/55R17	99H	13333	6.5 – 8.5	9.7 on 7.5	27.2	8.5	766	1709@44
235/55R18	100V	04213	6.5 – 8.5	9.7 on 7.5	28.2	8.5	739	1764@44
235/60R16	100H	10396	6.5 – 8.5	9.5 on 7.0	27.1	8.5	768	1764@44
245/45R18/XL	100V	08729	7.5 – 9.0	9.6 on 8.0	26.7	8.5	780	1764@50