



MICHELIN® Premier® LTX®

Safe When New. Safe When Worn¹.

Even when worn, the MICHELIN® Premier® LTX® tire still stops shorter on wet roads than leading competitors' brand-new tires².

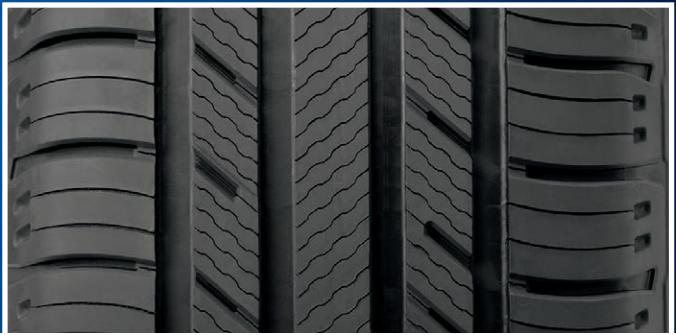

ALL-SEASON TIRE

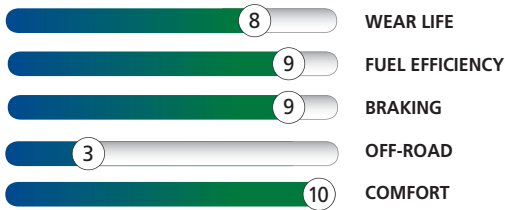

BENEFITS OF MICHELIN® PREMIER® LTX® TIRES:

- **Shorter Stopping.** Even when worn, the MICHELIN® Premier® LTX® tire still stops shorter on wet roads than leading competitors' brand-new tires².
- **Hydroplaning Resistance.** With EverGrip™ Technology, expanding rain grooves widen and emerging grooves open as the tire wears to maintain traction.
- **Excellent Wet Grip.** Extreme amounts of silica in the high-traction tread compound provide exceptional wet grip for everyday handling.
- **Lasting Winter Performance.** Sunflower oil keeps the high-traction tread compound flexible in lower temperatures, while multiple tread blocks and sipes act as biting edges to cut through the snow.

Popular Replacement Market Fitments:

Mercedes-Benz GLK Class • Mercedes-Benz GL Class • Cadillac Escalade
GMC Yukon • Chevy Tahoe • GMC Acadia • Buick Enclave
Jeep Grand Cherokee • Ford Escape Titanium • Toyota 4Runner Limited



¹ Safe refers to wet braking, wet handling and hydroplaning resistance when tires are new and worn to 5/32".
² Based on internal wet braking tests from 50 mph vs. Goodyear Assurance® CS TripleTred™ All-Season tire and Continental CrossContact™ LX20 tire in size 255/55R18 109H; using the MICHELIN® Premier® LTX® tire in size 255/55R18 109H buffed to 5/32" of tread. Actual on-road results may vary.



MICHELIN® Premier® LTX®

Tire Size	Service Description	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @ 45 mph	Max Load Single (lbs@psi)
215/65R16	98H	05066	6.0 – 7.5	8.7 on 6.5	27.2	8.5	768	1653@44
215/70R16	100H	10769	5.5 – 7.0	8.7 on 6.5	27.9	8.5	747	1764@44
225/60R17	99V	18734	6.0 – 8.0	9.0 on 6.5	27.9	8.5	749	1709@44
225/60R18	100H	37567	6.0 – 8.0	9.0 on 6.5	28.6	8.5	727	1764@44
235/45R19	95H	00851	7.5 – 9.0	9.3 on 8.0	27.4	8.5	758	1521@44
235/45R20/XL	100H	78562	7.5 – 9.0	9.3 on 8.0	28.5	8.5	728	1764@50
235/50R18	97V	17152	6.5 – 8.5	9.7 on 7.5	27.5	8.5	762	1609@44
235/50R19	99H	71044	6.5 – 8.5	9.7 on 7.5	28.2	8.5	735	1709@44
235/55R19	101H	61381	6.5 – 8.5	9.7 on 7.5	29.2	8.5	714	1819@51
235/55R19	101V	47408	6.5 – 8.5	9.7 on 7.5	29.2	8.5	714	1819@44
235/55R20	102V	13732	6.5 – 8.5	9.7 on 7.5	30.1	8.5	690	1874@51
235/60R17	102H	42589	6.5 – 8.5	9.5 on 7.0	28.2	8.5	741	1874@44
235/60R18	103H	70182	6.5 – 8.5	9.5 on 7.0	29.2	8.5	712	1929@44
235/60R18/XL	107V	31197	6.5 – 8.5	9.5 on 7.0	29.2	8.5	712	2150@50
235/65R17	104H	84768	6.5 – 8.5	9.5 on 7.0	29.2	8.5	715	1984@44
235/65R18	106V	08008	6.5 – 8.5	9.5 on 7.0	30.1	8.5	692	2094@51
245/50R20	102V	83032	7.0 – 8.5	10.0 on 7.5	29.8	8.5	699	1874@44
245/60R18	105V	62570	7.0 – 8.5	9.8 on 7.0	29.5	8.5	703	2039@44
245/60R20	107H	31067	7.0 – 8.5	9.8 on 7.0	31.8	8.5	655	2150@44
255/50R19/XL	107H	70193	7.0 – 9.0	10.4 on 8.0	29.2	8.5	710	2150@50
255/50R20/XL	109V	01443	7.0 – 9.0	10.4 on 8.0	30.2	8.5	687	2271@50
255/55R18/XL	109H	31932	7.0 – 9.0	10.4 on 8.0	28.8	8.5	721	2271@50
255/55R18/XL	109V	01240	7.0 – 9.0	10.4 on 8.0	28.8	8.5	721	2271@50
255/55R19/XL	111V	37341	7.0 – 9.0	10.4 on 8.0	29.9	8.5	692	2403@50
255/55R20/XL	110H	88035	7.0 – 9.0	10.4 on 8.0	30.9	8.5	671	2337@50
255/60R17	106V	15442	7.0 – 9.0	10.2 on 7.5	29.1	8.5	716	2094@51
255/60R19	109H	76384	7.0 – 9.0	10.2 on 7.5	31.1	8.5	670	2271@44
265/50R20	107V	10005	7.5 – 9.5	10.9 on 8.5	30.5	8.5	681	2150@44
265/60R18	110V	10268	7.5 – 9.5	10.7 on 8.0	30.5	8.5	682	2337@44
275/50R20	109H	30591	7.5 – 9.5	11.2 on 8.5	30.9	8.5	672	2271@44
275/55R17	109V	30842	7.5 – 9.5	11.2 on 8.5	28.7	8.5	726	2271@44
275/55R19	111H	18269	7.5 – 9.5	11.2 on 8.5	30.8	8.5	677	2403@44
275/55R20	113H	59560	7.5 – 9.5	11.2 on 8.5	31.7	8.5	657	2535@44
275/60R20	115H	83801	7.5 – 9.5	11.0 on 8.0	32.9	8.5	633	2679@44
285/45R22/XL	114H	04505	9.0 – 10.5	11.2 on 9.5	32.1	8.5	643	2601@50