

GEOLANDAR A/T-S®

Bold, off-road attitude combined with exceptional on-road performance.

GEOLANDAR A/T-S® all-terrain tires have an aggressive design that'll make today's trucks or SUVs stand tall. But the real beauty lies deeper. With features ranging from Multi-Stepped Grooves to Dual Interlocking Pyramid Sipes, every Geolandar A/T-S packs the absolute latest in technology to deliver long, even treadwear. Featuring an extensive size line-up, the Geolandar A/T-S, and its powerful on/off-road performance, can be experienced across a broad range of applications.

ROUNDED-EDGE TREAD BLOCKS

Softens the contact between individual tread blocks and the ground to combat uneven tire wear and reduce noise.




NEW COMPOUND TECHNOLOGY

Contributes to long, even wear through the integration of silica molecules.

DUAL INTERLOCKING PYRAMID SIPES

Maintain tread block rigidity for improved tire wear and excellent all-weather traction.



MULTI-STEPPED GROOVES

Increase surface area of the tread to increase traction in dirt or loose gravel while simultaneously reducing tread squirm for enhanced on-road capabilities.



LARGE TREAD BLOCKS

Mean more stability at highway speeds and enhanced handling with less noise.



AGGRESSIVE SIDEWALL PROTECTORS

Fight off sidewall cuts and abrasions, and increase off-road bite.




STAGGERED CENTER BLOCKS

Create more biting edges, which improve off-road performance.



FIVE PITCH VARIATION

Helps reduce pattern noise by varying the size and shape of the tread blocks.

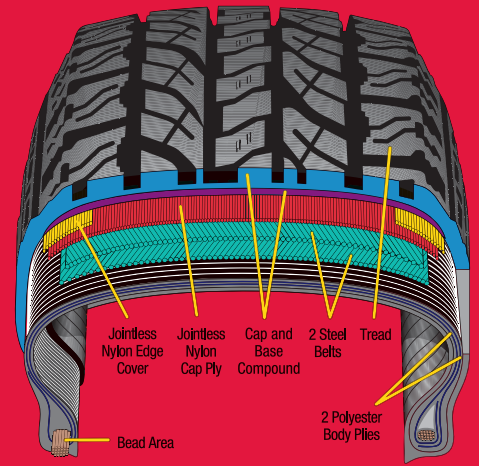

Construction may vary by size and/or speed rating.

For Vehicles Mentioned Below and Many Others:

Chevy Avalanche
Chevy Silverado
Dodge Dakota
Dodge Ram
Ford Expedition
Ford Explorer
Ford F-Series
Ford Ranger

Hummer H2
Jeep Cherokee
Nissan Frontier
Nissan Titan
Nissan Xterra
Toyota 4 Runner
Toyota Tacoma
Toyota Tundra

Yokohama's 30-day Performance Promise:

- Test drive the Geolandar A/T-S for 30 days. If not completely satisfied, bring them back for a full refund. See dealer for complete details.



Assurance of Value:

- 50,000-Mile Limited Treadwear Warranty on all sizes under 20" excluding load range E.
- 40,000-Mile Limited Treadwear Warranty on sizes 20" and above and load range E.



GEOLANDAR A/T-S®



Size Chart

Tire Size	Part No.	UTQG Rating	Unit Weight (lbs.)	Measuring (Inches)	Rim Width			Inflated Dimensions			Loaded Dimensions			Max. Load at Cold Inflation Pressure (lbs.@psi)		Type	Load I.D.
					Approved (Inches)	Overall Width (Inches)	Overall Diameter (Inches)	Tread Width (Inches)	Tread Depth (32/Inch)	Static Radius (Inches)	Revs. Per Mile	Single	Dual				
205/70R15 96S	01229	500/A/B	24.69	6.0	5.0 - 7.0	8.3	26.5	6.4	12	12.0	783	1565@51		RBL	SL		
215/70R15 98S	01261	500/A/B	26.24	6.5	5.5 - 7.0	8.8	26.9	6.7	12	12.1	774	1653@51		RBL	SL		
P225/70R15 100S	01258	500/A/B	29.10	6.5	6.0 - 7.5	9.1	27.6	7.0	12	12.4	753	1753@51		OWL	SL		
P235/70R15 102S	01245	500/A/B	31.09	7.0	6.0 - 8.0	9.6	28.0	7.3	13	12.6	743	1896@51		OWL	SL		
P235/75R15 108S	01235	500/A/B	34.17	6.5	6.0 - 8.0	9.3	28.9	7.3	13	12.9	720	2183@50		OWL	XL		
265/70R15 112S	01228	500/A/B	38.14	8.0	7.0 - 9.0	10.9	29.7	8.3	13	13.2	700	2469@51		RBL	SL		
215/60R16 95H	01259	500/A/A	25.13	6.5	6.0 - 7.5	8.7	26.1	6.7	12	11.9	796	1521@51		RBL	SL		
215/65R16 98H	01260	500/A/A	26.24	6.5	6.0 - 7.5	8.7	27.0	6.7	12	12.3	768	1653@51		RBL	SL		
215/70R16 100S	01224	500/A/B	28.00	6.5	5.5 - 7.0	8.6	28.0	6.7	12	12.7	742	1764@51		RBL	SL		
225/70R16 102H	01262	500/A/B	30.40	6.5	6.0 - 7.5	9.1	28.3	7.0	12	12.8	734	1874@51		RBL	SL		
235/60R16 100H	01253	500/A/A	28.22	7.0	6.5 - 8.5	9.4	27.0	7.3	12	12.3	769	1764@51		RBL	SL		
P235/70R16 107S	01239	500/A/B	33.73	7.0	6.0 - 8.0	9.5	29.2	7.3	13	13.2	711	2149@50		OWL	XL		
P245/70R16 106S	01236	500/A/B	34.83	7.0	6.5 - 8.0	9.8	29.7	7.6	13	13.3	700	2094@51		OWL	SL		
255/65R16 109H	01241	500/A/A	35.24	7.5	7.0 - 9.0	10.4	29.1	8.0	13	13.1	713	2271@51		RBL	SL		
P255/70R16 109S	01238	500/A/B	37.04	7.5	6.5 - 8.5	10.2	30.3	8.0	13	13.6	685	2271@51		OWL	SL		
P265/70R16 111S	01233	500/A/B	39.24	8.0	7.0 - 9.0	10.9	30.7	8.3	13	13.7	676	2403@51		OWL	SL		
275/70R16 114S	01240	500/A/B	42.67	8.0	7.0 - 9.0	10.9	31.4	8.6	13	14.0	662	2601@51		RBL	SL		
215/60R17 96H	01290 ^A									Data Not Available							
225/60R17 99H	01263	500/A/A	29.72	6.5	6.0 - 8.0	9.1	27.6	7.0	12	12.6	751	1709@51		RBL	SL		
225/65R17 102H	01266	500/A/A	31.09	6.5	6.0 - 7.5	9.1	28.5	7.0	12	13.0	728	1874@51		RBL	SL		
225/70R17 108T	01267	500/A/B	33.20	6.5	6.0 - 7.5	9.1	29.6	7.0	13	13.4	701	2205@50		RBL	RF		
235/65R17 108H	01247	500/A/A	33.73	7.0	6.5 - 8.5	9.4	29.2	7.3	13	13.2	712	2205@50		RBL	RF		
P235/70R17 108S	01268	500/A/B	36.20	7.0	6.0 - 8.0	9.5	30.3	7.3	13	13.7	686	2205@50		OWL	XL		
245/65R17 107H	01252	500/A/A	34.83	7.0	7.0 - 8.5	9.6	29.6	7.6	13	13.4	701	2149@51		RBL	SL		
255/65R17 110H	01250	500/A/A	36.60	7.5	7.0 - 9.0	10.2	30.3	8.0	13	13.7	685	2337@51		RBL	SL		
P255/70R17 110S	01269	500/A/B	40.10	7.5	6.5 - 8.5	10.2	31.3	8.0	13	14.1	664	2337@51		OWL	SL		
265/65R17 112H	01246	500/A/A	38.14	8.0	7.5 - 9.5	10.7	30.7	8.3	13	13.9	675	2469@51		RBL	SL		
P265/70R17 113S	01237	500/A/B	40.79	8.0	7.0 - 9.0	10.8	31.9	8.3	13	14.3	651	2535@51		OWL	SL		
P275/60R17 110S	01264	500/A/B	43.70	8.0	7.5 - 9.5	11.1	30.1	8.6	13	13.6	690	2337@51		OWL	SL		
275/65R17 115H	01248	500/A/A	41.45	8.0	7.5 - 9.5	11.0	31.3	8.6	13	14.1	664	2679@51		RBL	SL		
285/65R17 116H	01289 ^A									Data Not Available							
225/55R18 98H	01291 ^A									Data Not Available							
265/60R18 110H	01270	500/A/A	41.01	8.0	7.5 - 9.5	10.8	30.5	8.3	12	13.9	681	2337@51		RBL	SL		
P265/70R18 114S	01272	500/A/B	41.40	8.0	7.0 - 9.0	10.8	32.8	8.3	14	14.8	663	2601@51		RBL	SL		
275/60R18 112H	01271	500/A/A	41.90	8.0	7.5 - 9.5	11.1	31.0	8.6	12	14.1	669	2469@51		RBL	SL		
285/60R18 116H	01288 ^A									Data Not Available							
275/55R20 117S	01278 ^A									Data Not Available							
275/60R20 115S	01279 ^A									Data Not Available							
305/45R20 112H	01242	500/A/A	44.97	10.0	9.5 - 11.5	11.7	31.1	10.9	13	14.3	669	2469@51		RBL	SL		
305/50R20 120S	01280 ^A									Data Not Available							
LT215/75R15 100/97S (C)	01257		32.41	6.0	5.5 - 7.0	8.3	27.9	6.7	16	13.4	738	1765@50	1610@50	OWL			
LT235/75R15 104/101S (C)	01230		36.82	6.5	6.0 - 7.0	9.3	29.2	7.3	16	14.0	706	1985@50	1820@50	OWL			
LT215/85R16 110/107R (D)	01244		37.92	6.0	5.5 - 7.0	8.7	30.5	6.3	16	14.6	676	2335@65	2150@65	OWL			
LT225/75R16 110/107 (D)	01243		37.70	6.0	6.0 - 7.0	8.8	29.5	7.0	16	14.1	699	2335@65	2150@65	OWL			
LT235/85R16 120/116R (E)	01232		49.60	6.5	6.0 - 7.5	9.4	31.9	7.3	16	15.2	647	3042@80	2778@80	OWL			
LT245/75R16 120/116R (E)	01222		47.62	7.0	6.5 - 8.0	9.7	30.7	7.6	16	14.5	674	3042@80	2778@80	OWL			
LT265/75R16 119/116R (D)	01226		49.60	7.5	7.0 - 8.5	10.7	31.9	8.3	17	15.3	647	3000@65	2755@65	OWL			
LT265/75R16 123/120R (E)	01254		50.93	7.5	7.0 - 8.0	10.6	31.9	8.3	17	15.2	648	3415@80	3085@80	RBL			
LT285/75R16 122/119R (D)	01227		55.34	8.0	7.5 - 9.0	11.5	33.1	8.9	17	15.8	623	3305@65	3000@65	RBL			
LT315/75R16 121R (D)	01249		61.51	8.5	8.0 - 10.0	12.6	34.5	9.8	18	16.3	602	3195@50		RBL			
LT235/80R17 120/117R (E)	01281 ^A									Data Not Available							
LT245/70R17 119/116 (E)	01251		46.90	7.0	6.5 - 8.0	9.6	30.8	7.6	17	14.6	673	3000@80	2755@80	RBL			
LT245/75R17 121/118R (E)	01282 ^A									Data Not Available							
LT265/70R17 121/118R (E)	01234		52.20	8.0	7.0 - 8.5	10.5	32.0	8.3	17	15.0	651	3195@80	2910@80	RBL			
LT285/70R17 121/118R (D)	01285 ^A									Data Not Available							
LT315/70R17 121/118R (D)	01225		61.93	9.5	8.5 - 10	12.5	34.6	9.8	18	16.3	601	3195@50	2910@50	RBL			
LT275/65R18 113/110S (C)	01265		52.00	8.0	7.5 - 9.0	11.1	32.3	8.6	17	15.2	649	2535@50	2335@50	OWL			
LT275/65R18 123/120R (E)	01283 ^A									Data Not Available							
LT285/65R18 121/118R (D)	01284 ^A									Data Not Available							
LT305/55R20 121/118R (D)	01286 ^A									Data Not Available							
LT325/60R20 121/118R (D)	01287 ^A									Data Not Available							
30X9.50R15 104S (C)	01231		37.26	7.5	6.5 - 8.5	9.7	29.6	7.6	16	14.0	699	1985@50		OWL			
31X10.50R15 109S (C)	01223		43.65	8.5	7.0 - 9.0	10.7	30.6	8.3	17	14.4	680	2270@50		OWL			
32X11.50R15 113S (C)	01255		51.59	9.0	8.0 - 11.0	11.5	31.5	9.1	17	14.8	659	2535@50		OWL			
33X12.50R15 108S (C)	01256		54.31	10.0	8.0 - 11.0	12.8	32.5	9.8	17	15.5	636	2205@35		OWL			
37X12.50R17 124R (D)	01273		71.60	10.0	8.5 - 11.0	12.9	36.5	9.8	17	17.4	573	3525@50		RBL			
35X12.50R18 118R (D)	01274 ^A									Data Not Available							
37X12.50R18 123R (D)	01275 ^A									Data Not Available							
37X12.50R20 120R (D)	01276 ^A									Data Not Available							

^A Available 2nd Half 2009 RF = Reinforced Load SL = Standard Load XL = Extra Load

Consumer Affairs: 1-800-722-9888
Corporate Headquarters: Fullerton, CA 1-714-870-3800 • 1-800-423-4544
Visit our web site at: www.yokohamatire.com

